

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.


**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : <b>G06K 17/00, B65B 61/26</b>	<b>A1</b>	(11) International Publication Number: <b>WO 93/08541</b> (43) International Publication Date: <b>29 April 1993 (29.04.93)</b>
<p>(21) International Application Number: PCT/US92/08917</p> <p>(22) International Filing Date: 19 October 1992 (19.10.92)</p> <p>(30) Priority data: 07/779,239 18 October 1991 (18.10.91) US</p> <p>(71) Applicant: THE COCA-COLA COMPANY [US/US]; P.O. Drawer 1734, Atlanta, GA 30301 (US).</p> <p>(72) Inventor: KAY, Stephen, A. ; 45 Fieldgate Road, Luton, Bedfordshire LU4 9TA (GB).</p> <p>(74) Agents: O'BRIEN, Lynne, R.; The Coca-Cola Company, NAT 2044, P.O. Drawer 1734, Atlanta, GA 30301 (US) et al.</p>		<p>(81) Designated States: AU, CA, FI, JP, NO, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE).</p> <p>Published <i>With international search report.</i></p>

(54) Title: A METHOD AND DEVICE FOR CORRUPTING BAR CODES ON ARTICLES PRIOR TO PACKING

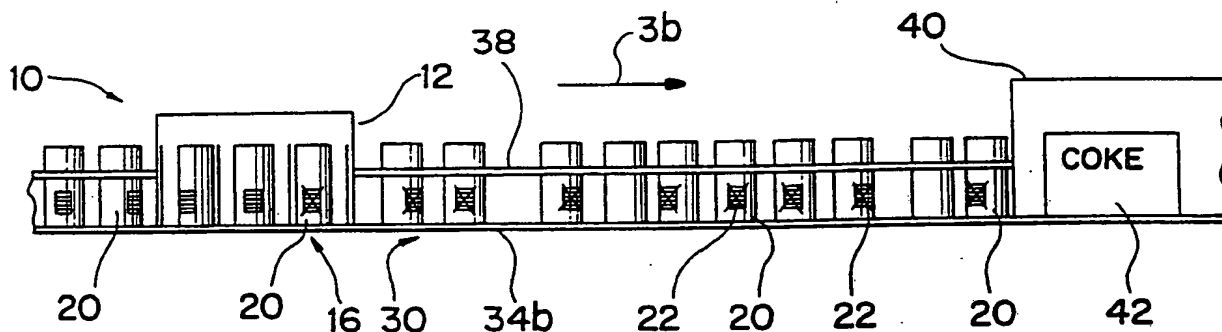

## (57) Abstract

A method and device for corrupting bar codes on articles, for packing the articles, and conveying the articles from an orienter to a packer. Each of the articles has a bar code which is positioned by the orienter to face a marking device. The orienter can be a linear device or a carousel device with a rotatable table. The marking device is either an ink jet or laser which will place a pattern through the bar code of each article. The packer will place a plurality of the articles in an open-ended receptacle such as a carton. Some of the bar codes will be visible through the open end of the receptacle. Due to the mark through these bar codes, however, these exposed bar codes cannot be read by an optical scanner.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SK	Slovak Republic
CI	Côte d'Ivoire	LK	Sri Lanka	SN	Senegal
CM	Cameroon	LU	Luxembourg	SU	Soviet Union
CS	Czechoslovakia	MC	Monaco	TD	Chad
CZ	Czech Republic	MG	Madagascar	TG	Togo
DE	Germany	ML	Mali	UA	Ukraine
DK	Denmark	MN	Mongolia	US	United States of America
ES	Spain			VN	Viet Nam
FI	Finland				

## TITLE OF THE INVENTION

A METHOD AND DEVICE FOR CORRUPTING BAR CODES  
ON ARTICLES PRIOR TO PACKING

## BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relate to a method and device for corrupting bar codes on a plurality of articles which are packaged in a receptacle. Either an ink jet or laser will place a mark through the bar code of each article such that this bar code can no longer be optically scanned.

Description of the Background Art

Many articles are now provided with bar codes which can automatically be read. However, when these individual articles are packaged together, it is often a problem that the bar code for a single article is read instead of a bar code for a package. Therefore, an inaccurate count of the articles will be had. For example, soda cans can be put into open-ended six packs as seen, for example, in Figure 8 of the instant application. These cans will have exposed bar codes through the open end of the carton. The carton will also have a bar code indicating the amount and price for six items. When a retailer, for example, scans carton, it is often the case that the exposed bar code on the can will be read instead of the bar code on the bottom of the carton. Therefore, a consumer will only be charged for a single soda instead of a six pack. Further, the inventory for the retailer will be incorrect.

In order to solve this problem, it has been proposed to add a bar code cover on each can as seen in Figure 7 of the instant application. While this arrangement will prevent a scanner from reading the individual bar codes on the cans, this end cover adds considerable expense to the cost of the carton.

As another alternative, it has been proposed to have two inventories of cans. One inventory will have a bar code indicating a single article whereas other cans will have bar codes indicating a six pack. These cans having six pack bar codes will only be packaged in cartons. In this manner, either the bar code on the carton or the bar code on the individual cans will be read. Either reading will indicate that a six pack of articles is present. In fact, the bar code on the bottom of the carton can be omitted in this arrangement.

However, this dual bar code arrangement has several drawbacks. For example, if a consumer breaks open a six pack and takes a single can to the register, the scanner will indicate that a six pack is being purchased. Not only can the consumer be overcharged, but the retailer's inventories will be inaccurate. Also, the use of dual cans having either single item or plural item bar codes increases the needed inventories, requires different

can decorations for each product and increases the filling line requirements. Specifically, either the filling lines handle only single or multipack cans thereby necessitating certain control devices or two separate filling lines must be used. Therefore, this arrangement is logistically more complicated and is more expensive than an arrangement using a can with

5 only a single bar code.

#### Summary of the Invention

Accordingly, it is a primary object of the present invention to provide an inexpensive method and apparatus for corrupting bar codes on articles prior to packing.

It is another object of the present invention to provide a method and apparatus  
10 which can be used with open-ended receptacles while assuring scanning of only the bar code on the receptacle.

It is a further object of the present invention to provide a method and device which voids the need for dual filling lines or extensive controls of the filling lines.

Another object of the present invention is to provide a method and device which  
15 avoids the need for plural empty article inventories.

Yet another object of the present invention is to provide a method and device which will assure proper bar code reading and which will alert retailer if a consumer opens a receptacle such that the consumer will not be overcharged and the retailer's inventories can accurately be maintained.

20 A further object of the present invention is to provide a device and method which can easily be incorporated into existing packaging lines.

Still another object of the present invention is to provide a method and device which is easy and inexpensive to use and maintain.

Further scope of applicability of the present invention will become apparent from  
25 the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modification within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

#### Brief Description of the Drawings

30 The present invention will become more fully understood from the detailed description given hereinbelow and the accompanying drawings which are given by way of illustration only, and thus are not limitative of the present invention, and wherein:

Figure 1 is a side view of a first embodiment of the device for corrupting bar code  
35 on articles and for packaging the articles of the present invention;

Figure 2 is a plan view of the first embodiment of the present invention;

Figure 3 is a side view of the second embodiment of a device for corrupting bar codes on articles and for packaging the articles of the present invention;

Figure 4 is a plan view of the second embodiment of the present invention;

Figure 5 is a side view of an article with a bar code;

Figure 6 is a side view of an article having a corrupted bar code;

Figure 7 is a perspective view of a prior art receptacle having an end cover; and

5 Figure 8 is a perspective view of an open-ended receptacle.

#### Detailed Description of the Preferred Embodiments

Referring in detail to the drawings and with particular reference to Figure 1, a device 10 for corrupting and conveying articles 20 is shown. These articles 20 in the instant invention are soda cans but it should be understood that many different types of  
10 articles can be used. A bar code 22 will be on each of the articles 20. An example of this article 20 is shown in Figure 5. As shown in Figure 6, the bar code 22 on these articles 20 can be corrupted with a mark 44. While Figure 6 schematically indicates a solid line 44, it should be understood that a noncontinuous mark can be made to corrupt bar code 22. For example, a dot pattern can be applied by an ink jet as will be described  
15 below. This dot pattern can be a single row or plural rows of dots which corrupt the bar code 22 to prevent further optical reading. If plural rows of dots are used, they can be spaced so closely together that they appear as a single line. On the other hand, a crossed line having an "X" shape can be used for the dot pattern.

Alternatively, a laser can be used to apply mark 44 as will be described below.  
20 While a continuous line 44 is shown in Figure 6, several discrete marks can be applied by the laser to the bar code. Sufficient marks will be made to prevent further optical scanning but will not render the can 20 unsightly. While many different configurations can be used for mark 44, it should be clear that this mark will simply prevent further optical reading of the bar code 22.

25 In order to corrupt the bar codes 22 on the articles 20, the present invention will first feed the articles to one of two types of orienters as will be discussed below. Of course, many different forms of orienter mechanisms can be used. As seen in Figures 1 and 2, the orienter 12 of the first embodiment is a carousel type device. This orienter 12 is provided with a rotatable table 16 movable in the direction indicated by arrow 18.  
30 Articles 20 can be placed in holders 24 on this table 16. The articles 12 will be rotated past an optical scanner 26. This orienter 12 will move the articles 20 such that their bar codes 22 face outwardly. The scanner 26 will check to ensure that the bar codes are properly located.

35 The orienter 12 will continue to rotate the articles 20 past the optical scanner 26 to the means 28 for marking. This means 28 for marking can be an ink jet or a laser as noted above. If an ink jet is used, a mark 44 is drawn through the bar code. On the other hand, a laser will place a mark 44 through the bar code 22. In the United States when corrupting bar codes 22 on cans, the can decoration is placed directly on the metal of the

can 20. It may therefore be desirable in the U.S. to use a laser while an ink jet may be preferred in Europe because of the use of an undercoating on the can.

It should be understood that many different arrangements can be used for placing a mark 44 through the bar code 22. Once the means 28 places this mark 44 through the bar code 22, these bar codes 22 are no longer optically readable.

A conveyor 30 is provided for moving the articles 20 through the device 10 in the direction indicated by arrow 36. Side rails 38 can be provided on this conveyor 30. This conveyor 30 can have an upstream section 32 for feeding the articles 20 to the orienter 12. Downstream from the orienter 12, the conveyor section 34 can split into a first and second side 34a, 34b. In this manner, dual rows of articles 20 are fed to packer 40. The packer 40 can then readily package the articles into a receptacle 42 such as a six pack. It should be understood that any number of rows can be used to feed articles to the packer 40 or that the packer can have a single infeed line which then sorts articles into various rows. While two rows of articles are shown, it should be understood that any number of rows or a single row can be formed in receptacle 42. Regardless of the number of rows, the packer 40 will place a plurality of articles 20 into a receptacle 42.

Turning now to the second embodiment shown in Figures 3 and 4, a linear type of orienter 14 is used. In this arrangement, the upstream conveyor has two sections 32a and 32b which feed articles 20 to the orienter 14. As the articles are fed through this orienter 14, they will be moved such that their bar codes face a particular direction. For example, the bar codes can face outwardly. Two optical sensors 26a and 26b can be provided for reading bar codes on each line. Alternatively, a single scanner can be positioned between the two lines if, for example, the bar codes are to face inwardly. It should be understood that the exact orientation of the bar codes on the articles can be changed. It is merely important that each article is consistently positioned by the orienter 14.

From this orienter 14, the articles 20 will be fed to the means 28 for marking. Similarly to the first embodiment, this means 28 for marking can be an ink jet or a laser.

Downstream from the means 28 for marking are the first and second conveyor lines 34a and 34b. These lines will feed the articles to the packer 40. Similarly to the above-discussed arrangement, a single line or any number of lines of articles can be fed to the packer 40. As seen in Figure 8, the receptacle 42 will have open ends 52. While the rear end of receptacle 42 is not shown in this figure, it can be appreciated that this end is also open. The articles 20 which are placed in this receptacle 42 shown in Figure 8 do not have corrupted bar codes. It should readily be understood that when using the instant device, these bar codes 22 will have a mark 44 drawn therethrough. In this manner, when a consumer purchases a six pack, for example, the retailer will scan the receptacle 42. The scanner will only read bar code 48 on the bottom of the receptacle 42 because the bar codes 22 on each individual can will be corrupted by mark 44. In this manner, the instant

device 10 prevents further optical reading of the bar codes 2. Dual inventories of bar codes and dual filling lines are avoided. Moreover, it is unnecessary to modify the can design when using the instant invention.

The instant invention further includes the method for corrupting the bar codes on the articles and for packaging the articles. As described with reference to the device 10, this method will involve providing a plurality of articles 20 each having a bar code 22. These articles will then be conveyed in a predetermined direction by conveyor 30. An orienter 12 or 14 will then position the bar codes at a predetermined location. The means 28 (ink jet or laser) will directly mark through the bar code. The articles will be packaged by a packer 40 in a receptacle 42 such that the bar codes of at least some of the articles will be visible. Specifically, the end articles 20 in the open ended receptacle 42 can be visible if they are rotated in the proper direction. Regardless of which bar codes 22 on articles 20 are visible in receptacle 42, they cannot further be optically read because of the mark 44 placed thereon by the means 28. In other words, optical reading of the bar codes is prevented as a result of the marking such that the bar codes which are visible in receptacle 42 are unreadable by an optical scanner.

Because the means 28 directly marks the bar codes 22, it is unnecessary to provide a lap (such as bar code cover 50) or any other obstruction device on the package. Therefore, the cost of the receptacle is kept low. Misreading of the package of articles is prevented and inventory counts can more accurately be maintained with the instant device and method.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.



What is claimed is:

1. A method for corrupting bar codes on articles and for packaging the articles comprising the steps of:

providing a plurality of articles, each of the articles having a bar code thereon;

5 conveying the articles in a predetermined direction;

orienting each of the articles to position the bar code at a predetermined location;

directly marking through the bar code on each article;

packing a plurality of articles in a receptacle with the bar codes of at least some of the articles being visible outside the receptacle; and

10 preventing optical reading of the bar code of each article as a result of the step of marking, the bar codes which are visible in the receptacle being unreadable by an optical scanner.

2. The method as recited in Claim 1, wherein the step of marking comprises placing a pattern through the bar code of each of the articles.

15 3. The method as recited in claim 2, wherein the step of marking comprises drawing a dot pattern through the bar code of individual articles with an ink jet or placing the pattern through the bar code of individual articles with a laser.

4. The method as recited in claim 1, wherein the step of conveying comprises moving each article through an orientation device, past the ink jet or the laser and to a packer, the ink jet or the laser being used in the step of marking and the packer being used in the step of packaging.

5. The method as recited in claim 4, further comprising the step of optically scanning after the step of orienting and before the step of marking to check the location of the bar code on each of the articles.

25 6. The method as recited in claim 4, wherein the step of orienting comprises linearly moving the articles through the orientation device and moving each article in the orientation device to the predetermined location such that each article will face the ink jet or the laser, and wherein the step of conveying comprises the step of moving the articles in two lines through the orientation device and to the packer whereat two rows of articles are packaged in the receptacle.

30 7. The method as recited in claim 4, wherein the step of orienting comprises rotating the articles on a rotatable table while moving each article to the predetermined location such that each article will face the ink jet or the laser, and wherein the steps of optically scanning and marking are carried out while the articles are on the rotatable table and where the step of conveying comprises moving the articles in two lines from the rotatable table to the packer whereat two rows of articles are packaged in the receptacle.

35 8. A device for corrupting bar codes on articles and for packing the articles, each of the articles having a bar code thereon, the device comprising:





a conveyor for conveying the articles in a predetermined direction;  
means for directly marking through a bar code of each article;  
an orienter for arranging each article such that the bar code thereon faces the  
means for marking;

5 a packer for placing the articles in a receptacle with the bar codes of at least some  
of the articles being visible outside the receptacle; and

the conveyor conveying the articles from the orienter to the packer and the bar  
codes on the articles marked by the means for marking being unreadable by an optical  
scanner such that bar codes visible in the receptacle are prevented from being optically  
10 read.

9. The device as recited in claim 8, further comprising dual conveyor lines  
before the packer such that two rows of articles are fed to the packer and two rows of  
articles are packaged in the receptacle, the receptacle being an open-ended carton and the  
articles being cans, the packer placing six cans in the carton.

15 10. The device as recited in claim 8, wherein the means for directly marking  
comprises either an ink jet for drawing a dot pattern through the bar code of each article,  
or a laser for placing a pattern through the bar code of each article, the device further  
comprising an optical scanner for checking the orientation of the articles before the  
articles reach the means for marking.

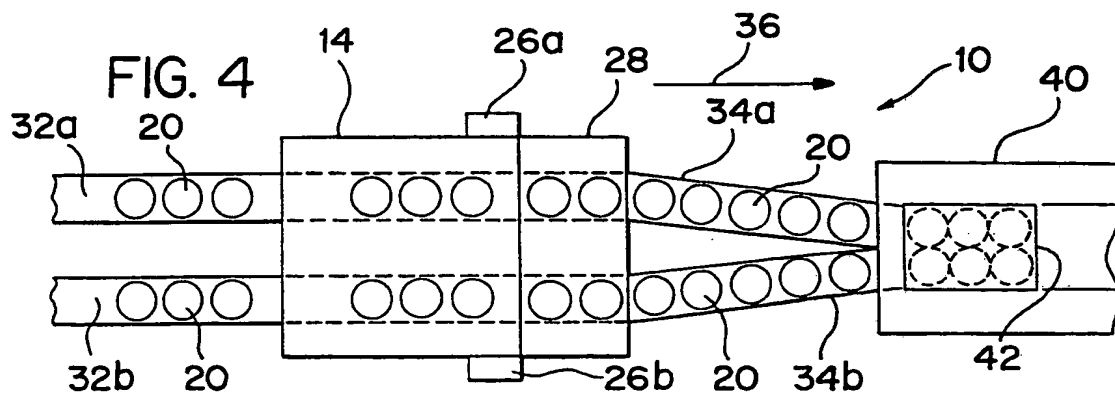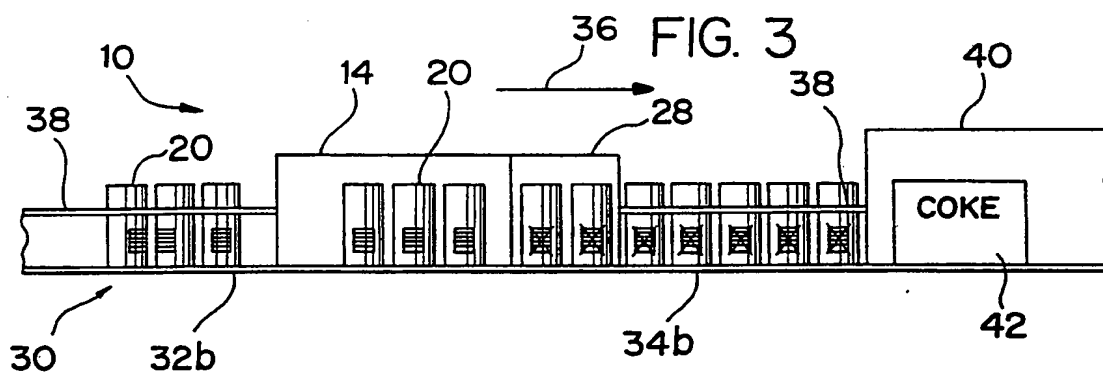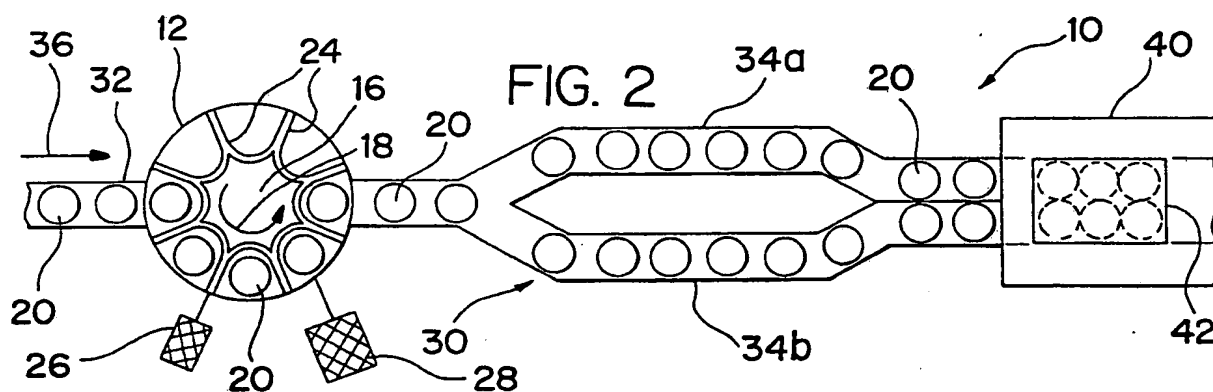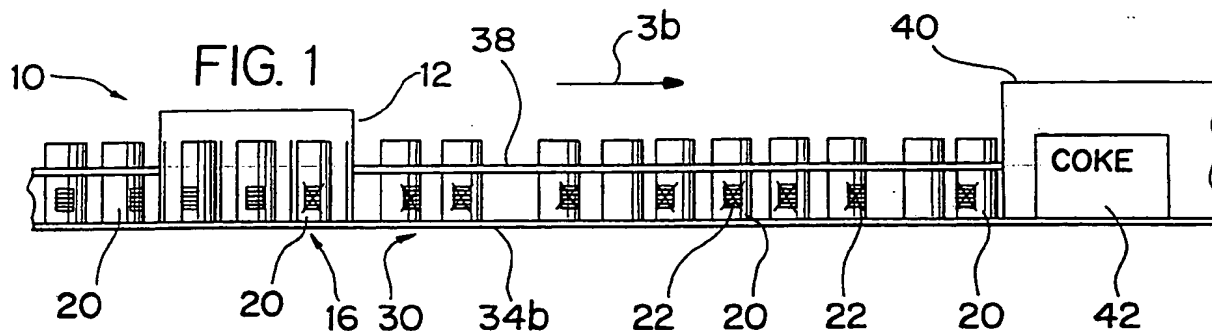

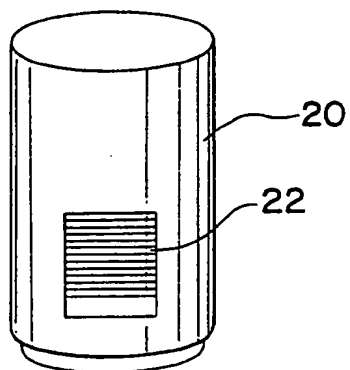


FIG. 5

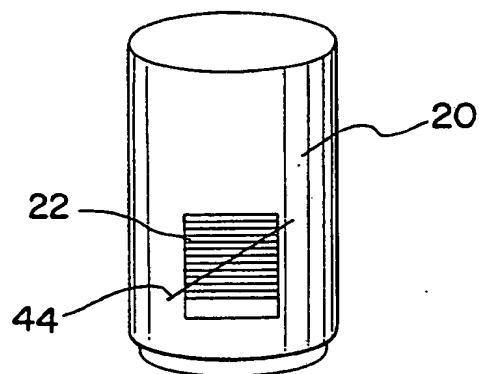


FIG. 6

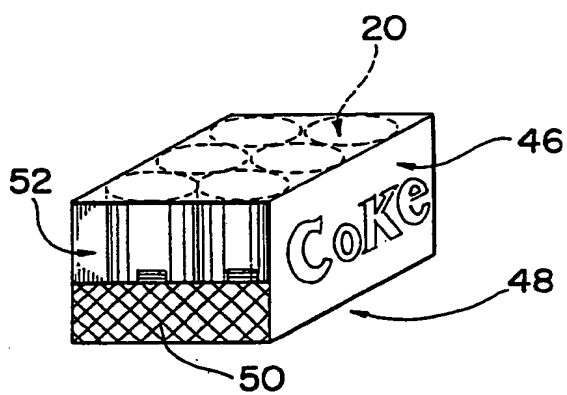


FIG. 7  
PRIOR ART

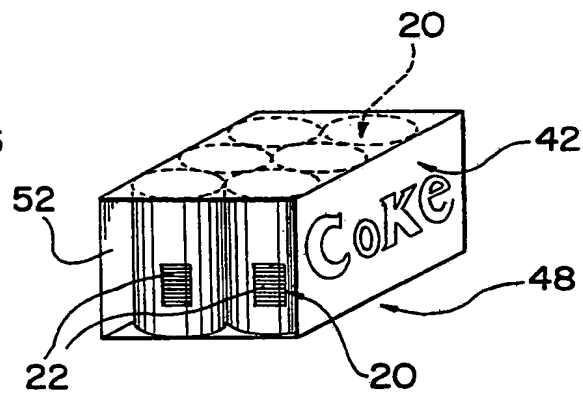


FIG. 8

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 92/08917

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>6</sup> According to International Patent Classification (IPC) or to both National Classification and IPC IPC <sup>5</sup> : G 06 K 17/00, B 65 B 61/26																				
<b>II. FIELDS SEARCHED</b> <div style="text-align: right; font-size: small;">Minimum Documentation Searched <sup>7</sup></div> <table style="width: 100%; border: none;"> <tr> <td style="width: 20%; border: none;">Classification System</td> <td style="border: none;">Classification Symbols</td> </tr> <tr> <td style="border: none; vertical-align: top;">IPC<sup>5</sup></td> <td style="border: none; vertical-align: top;">G 06 K, B 65 B</td> </tr> </table> <div style="text-align: center; font-size: x-small; margin-top: 10px;">Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched <sup>8</sup></div>			Classification System	Classification Symbols	IPC <sup>5</sup>	G 06 K, B 65 B														
Classification System	Classification Symbols																			
IPC <sup>5</sup>	G 06 K, B 65 B																			
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup></b> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%; font-size: x-small;">Category <sup>10</sup></th> <th style="width: 70%; font-size: x-small;">Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup></th> <th style="width: 20%; font-size: x-small;">Relevant to Claim No. <sup>13</sup></th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>US, A, 3 560 745 (RUSSEL) 02 February 1971 (02.02.71), see abstract; fig. 1. ---</td> <td style="text-align: center; vertical-align: top;">1, 8</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>EP, A2, 0 300 729 (KABUSHIKI) 25 January 1989 (25.01.89), see abstract; fig. 1. ---</td> <td style="text-align: center; vertical-align: top;">1, 8</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>US, A, 4 939 355 (RANDO et al.) 03 July 1990 (03.07.90), see abstract; fig. 1-3. ---</td> <td style="text-align: center; vertical-align: top;">1, 8</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>US, A, 3 566 120 (LESLIE) 23 February 1971 (23.02.71), see abstract; fig. ---</td> <td style="text-align: center; vertical-align: top;">1, 8</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>US, A, 4 044 227 (HOLM et al.) 23 August 1977</td> <td style="text-align: center; vertical-align: top;">1, 8</td> </tr> </tbody> </table>			Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>	A	US, A, 3 560 745 (RUSSEL) 02 February 1971 (02.02.71), see abstract; fig. 1. ---	1, 8	A	EP, A2, 0 300 729 (KABUSHIKI) 25 January 1989 (25.01.89), see abstract; fig. 1. ---	1, 8	A	US, A, 4 939 355 (RANDO et al.) 03 July 1990 (03.07.90), see abstract; fig. 1-3. ---	1, 8	A	US, A, 3 566 120 (LESLIE) 23 February 1971 (23.02.71), see abstract; fig. ---	1, 8	A	US, A, 4 044 227 (HOLM et al.) 23 August 1977	1, 8
Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>																		
A	US, A, 3 560 745 (RUSSEL) 02 February 1971 (02.02.71), see abstract; fig. 1. ---	1, 8																		
A	EP, A2, 0 300 729 (KABUSHIKI) 25 January 1989 (25.01.89), see abstract; fig. 1. ---	1, 8																		
A	US, A, 4 939 355 (RANDO et al.) 03 July 1990 (03.07.90), see abstract; fig. 1-3. ---	1, 8																		
A	US, A, 3 566 120 (LESLIE) 23 February 1971 (23.02.71), see abstract; fig. ---	1, 8																		
A	US, A, 4 044 227 (HOLM et al.) 23 August 1977	1, 8																		
<div style="display: flex; justify-content: space-between; font-size: x-small;"> <div style="width: 45%;"> <p><sup>14</sup> Special categories of cited documents: <sup>10</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"Z" document member of the same patent family</p> </div> </div>																				
<b>IV. CERTIFICATION</b> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;">           Date of the Actual Completion of the International Search   <div style="text-align: center;">14 January 1993</div> </td> <td style="width: 50%; border: none; vertical-align: top;">           Date of Mailing of this International Search Report   <div style="text-align: center; font-size: large;">02 FEB 1993</div> </td> </tr> <tr> <td style="width: 50%; border: none; vertical-align: top;">           International Searching Authority   <div style="text-align: center;">EUROPEAN PATENT OFFICE</div> </td> <td style="width: 50%; border: none; vertical-align: top;">           Signature of Authorized Officer   <div style="text-align: center;">MIHATSEK e.h.</div> </td> </tr> </table>			Date of the Actual Completion of the International Search  <div style="text-align: center;">14 January 1993</div>	Date of Mailing of this International Search Report  <div style="text-align: center; font-size: large;">02 FEB 1993</div>	International Searching Authority  <div style="text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer  <div style="text-align: center;">MIHATSEK e.h.</div>														
Date of the Actual Completion of the International Search  <div style="text-align: center;">14 January 1993</div>	Date of Mailing of this International Search Report  <div style="text-align: center; font-size: large;">02 FEB 1993</div>																			
International Searching Authority  <div style="text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer  <div style="text-align: center;">MIHATSEK e.h.</div>																			

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, " with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	<p>(23.08.77), see abstract; fig. 1-3. ---</p> <p>DE, A1, 3 322 193 (DUDZIK) 10 January 1985 (10.01.85), see abstract; fig. 1,6. ----</p>	1,8

## ANHANG

zum internationalen Recherchen-  
bericht über die internationale  
Patentanmeldung Nr.

## ANNEX

to the International Search  
Report to the International Patent  
Application No.

## ANNEXE

au rapport de recherche inter-  
national relatif à la demande de brevet  
international n°

PCT/US92/08917 SAE 66046

In diesem Anhang sind die Mitglieder  
der Patentfamilien der im obenge-  
nannten internationalen Recherchenbericht  
angeführten Patentdokumente angegeben.  
Diese Angaben dienen nur zur Unter-  
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family  
members relating to the patent documents  
cited in the above-mentioned inter-  
national search report. The Office is  
in no way liable for these particulars  
which are given merely for the purpose  
of information.

La présente annexe indique les  
membres de la famille de brevets  
relatifs aux documents de brevets cités  
dans le rapport de recherche inter-  
national visée ci-dessus. Les renseigne-  
ments fournis sont donnés à titre indica-  
tif et n'engagent pas la responsabilité  
de l'Office.

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
US A 3560745	02-02-71	keine - none - rien	
EP A2 300729	25-01-89	EP A3 300729 JP A2 1023383	30-05-90 26-01-89
US A 4939355	03-07-90	EP A2 325469 EP A3 325469 JP A2 1244586	26-07-89 18-12-91 28-09-89
US A 3566120	23-02-71	keine - none - rien	
US A 4044227	23-08-77	keine - none - rien	
DE A1 3322193	10-01-85	DE C2 3322193	23-07-92